


**BEST**   
dormakaba Group

# Miscellaneous by BEST

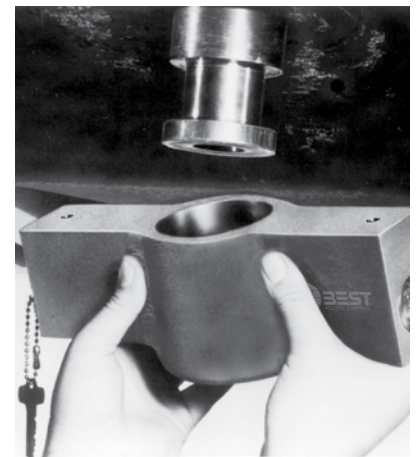

BEST: Setting the Standard for Security


# TABLE OF CONTENTS

|   |   |  |     |
|---|---|--|-----|
| C Series – Cores .....                  | 2 | 2S Series – Sliding Door Lock .....      | 4   |
| Patented Keying System .....            | 2 | 3S Series – Sliding Panel Lock .....     | 5   |
| 2J Series – Semi-Trailer King Pin ..... | 3 | 4S Series – Sliding Door Cylinder .....  | 5   |
| 2P Series – Push Lock .....             | 4 | KRD Series – Key Retaining Devices ..... | 6-7 |



The C Series is ANSI BHMA A156.5 certified

## C Series – Cores & Special Application Cores

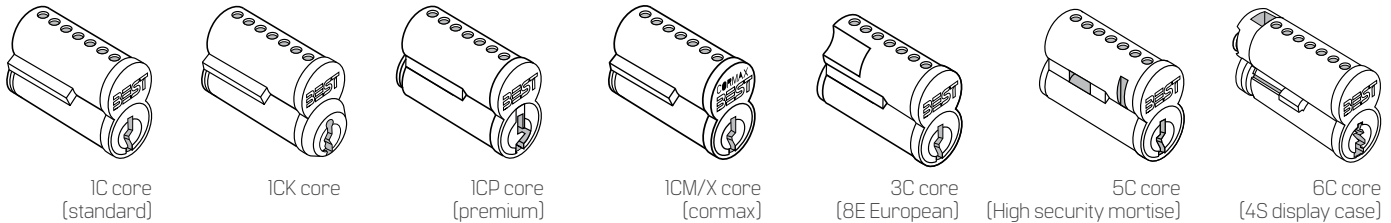

### How To Order – C Series

| IC                    | 7                        | A                                      | 1                | 606                                   |        |
|-----------------------|--------------------------|--|------------------|---------------------------------------|--------|
| Core Type             | Core Size                | Keyway Code                            | Combination Code | Options                               | Finish |
| 1C – standard         | 5 – 5 pin (1C only)      | Designate specific keyway (A, E, etc.) | 1 – uncombined   | B* – pick & drill resistant (1C only) | 605    |
| 1CK – patented        | 6 – 6 pin (1C, 1CK only) |  | 2 – combined     | K* – key trap                         | 606    |
| 1CP – premium         | 7 – 7 pin                |  |                  | T* – deadlocking (6C only)            | 612    |
| 1CM – Cormax-M series |                          |  |                  |                                       | 613    |
| 1CX – Cormax-X series |                          |  |                  |                                       | 625    |
| 3C – for 8E cylinder  |                          |  |                  |                                       | 626    |
| 5C** – high security  |                          |  |                  |                                       |        |
| 6C – for 4S cylinder  |                          |  |                  |                                       |        |


\*Extra cost option. \*\*Long blade key required. If combined, you must specify keymark and number of keys.

## CORMAX™ Patented Keying System

BEST® CORMAX™ is the premier patented keying system offered by BEST. CORMAX will meet your needs for security, key control, and convenience. A simple solution with no compromising allowed. CORMAX is the upgrade path for existing BEST Standard, Premium, and MX8 customers; and it is an essential element of non-residential access control as security administrators strive to eliminate the unauthorized duplication of keys.

### CORMAX offers the following features and benefits:

- A long-term US utility patent that guarantees the extended useful life of the system through 2027.
- A second, independent locking mechanism that utilizes a patented set of built-in side pins to provide higher security.
- Several levels of geographical exclusivity, including national exclusivity, are available via the patented side pin feature.
- CORMAX cores and keys are available exclusively through BEST sales offices. Key blanks are only sold to individuals authorized by the customer to ensure key blanks do not end up in the possession of unauthorized personnel either inside or outside the customer's facility.
- CORMAX cores are certified to meet the security, safety, and reliability requirements of BHMA A156.5 Grade 1.
- Picking and drilling resistance options are available if higher levels of security are desired.
- Complete factory masterkeying service offered, and at no charge with purchase of BEST locksets and PHI exit devices.
- Keyways are organized in families of four keyways each, with double-milled and quad-milled key levels to facilitate the design of masterkey systems in multi-building campuses.
- BEST CORMAX cores are compatible with all existing BEST interchangeable core housings, eliminating the need for new or modified locksets.

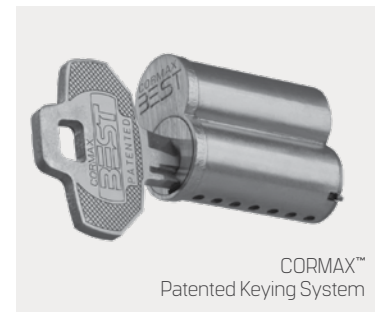

CORMAX™ Patented Keying System


# J Series – Semi-Trailer Kingpin Lock

## Operation

The semi-trailer lock, locks onto the kingpin on a dropped semi-trailer to prevent hookup. The lock is automatically secured when pushed onto the kingpin and the key(s) can be withdrawn only in the locked position. Bright red finish signals driver not to back into lock. The deadlocking bolt functions listed below (D11, D21) feature a dead locking bolt controlled by key to prevent bolt(s) from being shimmed or jimmed. A key is necessary both to secure and remove dead locking bolt models.



2J7L11  
Single latch armored kingpin lock operated by single key.

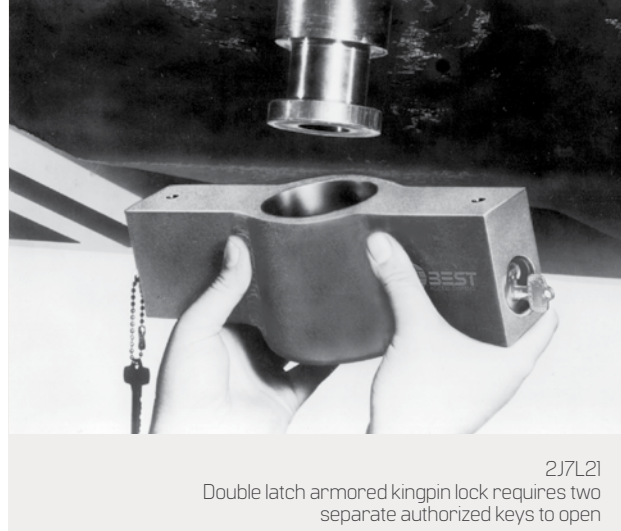

2J7L21  
Double latch armored kingpin lock requires two separate authorized keys to open

## Specifications

**Case** – Structural steel, machined solid steel head(s) heliarc welded to center body. Single head 8" x 8-3/4" x 4", weight approx. 15 lbs. Double head 11-1/2" x 3-3/4" x 4". Weight approx. 19 lbs.

**Latch projection** – 15/32"

**Cylinder(s)** – Brass with interchangeable core

**Finish** – Case, bright red crinkle finish; cylinders and cores 606

**Armored front protection** – Standard. Cylinder and core protected with hardened steel plate. Requires long blade key. Optional extended block (without armor pack age) to protect cylinder.

## Semi-Trailer Kingpin Storage Rack


Mounts on wall. Holds 3 or 5 kingpin locks. Requires key to remove locks. Black finish standard. Plated corrosion resistant finish available.

- Three-post mount 2JOR3 (2JOR3C-plated).
- Five-post mount 2JOR5 (2JOR5C-plated).
- Specify finish with order.

### How To Order – J Series

| Series             | Core Housing                             | Function Code  | Options                           |
|--------------------|--|--|-----------------------------------|
| 2J – standard body | 7 – 7-pin housing accepts all BEST cores | L11 – single latch type<br>L21 – double latch type<br>D11 – single deadlatch type<br>D21 – double deadlatch type | TA – extended block without armor |

Must specify key mark and number of keys or designate L/C for less core.

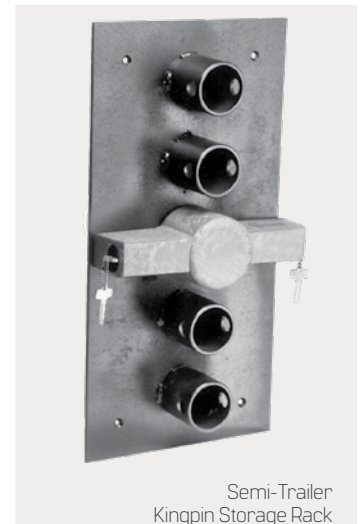

Semi-Trailer Kingpin Storage Rack

## 2P Series – Push Locks For Filing Cabinets

### Specifications

**Material** – Parts are solid brass; phosphor bronze springs.

**Dimensions** – See illustration and table.

**Finish** – 2P series 626 (satin chrome) standard finish.

The 2P series incorporates the BEST interchangeable core and requires special cabinet preparation. It may be keyed individually, keyed alike, masterkeyed or grand-masterkeyed with other BEST removable core products.

#### Vertical Mounting Slot (Dimensions in inches)


|                       | A       | B    | C      | D      | E    | F | G | H     | I    | J     | K     | L     |
|-----------------------|---------|------|--------|--------|------|---|---|-------|------|-------|-------|-------|
| <b>2P73</b> (7Barrel) | 2-9/32" | 1/4" | 19/32" | 1-1/8" | 3/4" |   |   | 5/16" | 1/8" | 5/32" | #6-32 | 5/32" |

#### Horizontal Mounting Slot (Dimensions in inches)

|                       |         |      |        |        |      |       |      |  |  |       |       |       |
|-----------------------|---------|------|--------|--------|------|-------|------|--|--|-------|-------|-------|
| <b>2P74</b> (7Barrel) | 2-9/32" | 1/4" | 19/32" | 1-1/8" | 3/4" | 5/16" | 1/8" |  |  | 5/32" | #6-32 | 5/32" |
|-----------------------|---------|------|--------|--------|------|-------|------|--|--|-------|-------|-------|

|           |          |  |          |  |  |  |          |  |  |            |  |  |
|-----------|----------|--|----------|--|--|--|----------|--|--|------------|--|--|
| <b>2P</b> | <b>7</b> |  | <b>E</b> |  |  |  | <b>1</b> |  |  | <b>626</b> |  |  |
|-----------|----------|--|----------|--|--|--|----------|--|--|------------|--|--|

| Series           | Lock Housing                     | Keyway                    | Combination Code               | Finish |
|------------------|----------------------------------|---------------------------|--------------------------------|--------|
| <b>2P</b> – file | 7– 7-pin body may be keyed 6-pin | Designate specific keyway | 1 – uncombined<br>2 – combined | 626    |

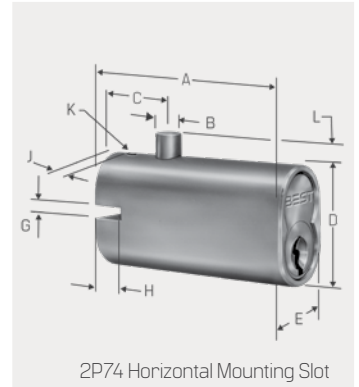

## 2S Series – Push Lock For Sliding Doors

### Specifications

**Case** – Extruded brass

**Width** – 1-1/2"

**Thickness** – 23/32"

**Inside Face Plate** – 2-3/4" x 7/8"; hole spacing 1-7/8"

**Detachable Face Plate** – 1/16" x 1-1/8" x 2-3/4"; hole spacing 2-3/16"

**Finish** – Base finish, 626, supplied unless otherwise specified

\*Screws may be cut up to 5/8" shorter for doors to 7/8" door thickness.


#### Function Code Chart

| Function Code | Door Thickness      | Bolt  | Operation   |
|---------------|---------------------|---|---|
| <b>Series</b> | <b>Core Housing</b> | <b>Shackle Height</b>                                 | <b>Function Code</b>  |
| 2S73          | to 1-5/8"           | 19/32" dia. 1/2" throw                                | When unlocked, case of lock moves out through door stile and may be used as handle for moving door. To lock 2S73 and 2S74 push case in through door. Spring locking action. To lock 2S75 operate key and push case "IN" through door to engage bolt retaining pin behind strike plate in opposite door. |
| 2S73 x TBM    | 7/8" to 1-5/8"      | 19/32" dia. 1/2" throw                                |   |
| 2S74 x TBM    | 7/8" to 1-5/8"      | 19/32" dia. 3/4" throw                                |   |
| 2S75          | 3/4" to 1-5/8"      | 1/2" dia. x 7/16" Bolt engagement<br>1/8" locking pin |   |

#### How To Order – 2S Series

|           |          |          |            |
|-----------|----------|----------|------------|
| <b>2S</b> | <b>7</b> | <b>5</b> | <b>626</b> |
|-----------|----------|----------|------------|

| Series                             | Core Housing                              | Function Code | Standard Finish                   | Options                    |
|------------------------------------|---|---------------|-----------------------------------|----------------------------|
| <b>2S</b> – sliding door push lock | 7 – 7 pin housing accepts all BEST® cores | see above     | 626 – standard<br>605 606 622 625 | <b>SP</b> – support plate* |

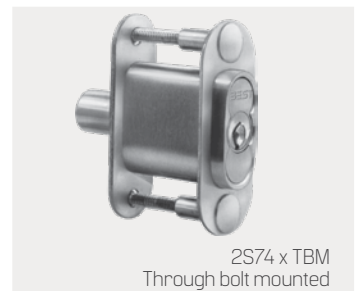

## 3S Series – Sliding Panel Lock

### Operation

A stainless steel strap mounts permanently on the inner sliding panel. When panels are closed, the tongue of the strike strap extends beyond the edge of the outer panel.


To lock panels, slide lock housing onto overlapping tongue and up against edge of outer panel. Lock by turn of key. Key is removable in locked position only.

### 3S Series Specifications

**Strike strap** – stainless steel, 1/2" wide.

**Locking housing** – aluminum.


**Finish** – 627 aluminum only.

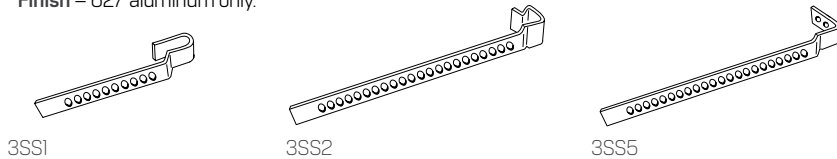

### How To Order – 3S

| 3S                      | 7  | 5   | S2   | 627             |
|-------------------------|--|---|--|-----------------|
| Series                  | Core Housing                             | Function Code   | Combination Code                           | Standard Finish |
| 3S – sliding panel lock | 7 – 7 pin housing accepts all BEST cores | 5 – straight lock housing<br>7 – captured panel lock<br>8 – 1" extended housing | 3SS2 – standard unless otherwise specified | 627             |

Must specify key mark and number of keys or designate L/C for less core.

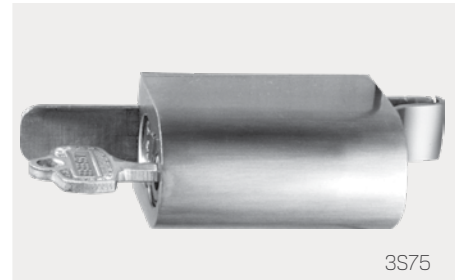

3S75



3S77

### 3S-Strike Strap Chart

| Strike strap | Length | Thickness |
|--------------|--------|-----------|
| 3SS1         | 4-1/4" | 1/4"      |
| 3SS2         | 6-1/4" | 7/32"     |
| 3SS3         | 6-1/4" | 5/16"     |
| 3SS4         | 6-1/4" | 13/32"    |
| 3SS5         | 6-1/4" | 3/4"      |

## 4S Series – Sliding Door Cylinder

The 4S73 locking cylinder for sliding doors offers quality security and Masterkey versatility by integrating a modified BEST interchangeable core into the actual locking mechanism. This machined solid brass cylinder is designed for use on display cabinets, window displays, or other storage areas that are closed by sliding panels of glass, plastic, wood, etc. Available in a variety of finishes (bright chrome standard), the 4S73 can be keyed into any new or existing BEST System.

### 4S Series Specifications

**Cylinder** – Head diameter – 1-3/8", cylinder projection – 3/8". Fits 1-3/16" diameter hole in door. Machined from solid brass.

**Clamp Plate** – Stainless steel.

**Mounting** – Cylinder attached with 2 stainless steel screws. Supplied with 2 clear vinyl washers for mounting on glass doors.

**Door thickness** – 1/4"

**Finish** – 625 bright chrome supplied standard. Available in 605, 606, 626.

**Core** – Special 7 pin core prevents complete removal of core from cylinder. Machined from solid brass. 6C or 6CT core is required.

### Operation

Core body blocks door from sliding open when in the locked position. To unlock, insert key to retract locking lug and pull core forward to the unlocked position. 6C core must be ordered if key is to be removable in the locked or unlocked position. 6CT core must be ordered if key is to be removable only in the locked position.

### How To Order – 4S

| 4S                         | 7  | 3                                  | 627                           |
|----------------------------|--|------------------------------------|-------------------------------|
| Series                     | Core Housing                             | Function Code                      | Finish                        |
| 4S – sliding door cylinder | 7 – pin housing accepts (6C or 6CT only) | 3 – standard<br>4 – for wood doors | 626 – standard<br>605 606 622 |

Must specify key mark and number of keys or designate L/C for less core.



4S73 Mounted on glass cabinet-unlocked position



4S73 Mounted on glass cabinet-locked position

# KRD Series – Key Retaining Devices

## Key Retainer Device Operation and Benefits

The key retaining device is an effective tool for improving key control. With a key retaining device, a release key is inserted into the retaining device and rotated. The rotation of this key both releases the retained key and traps the release key. The release key remains trapped until the retained key is returned and rotated. When this happens, the release key can be extracted, but the retained key is trapped. These retaining devices establish accountability for important keys (ex: master keys, emergency bypass keys, etc.) and dramatically reduce both human mistakes and risk exposure for higher level keys. These effective put-and-take systems act as mechanical sign-out sheets. When the cores are installed, the standard #10 front mounting screws are concealed. Additional 1/4-20 threaded mounting holes are provided in the back of each KRD case.

## How It Functions...A simple put-and-take method of operation

GM or any high level key retained in KRD waiting for any authorized user to remove it when needed

An authorized user inserting their personally identified release key

User rotates release key and the high level retained key is now ready for removal

Authorized user removing the previously secured high level key and can use it as needed

Authorized user key is retained (held captive/trapped) until the high level key is returned to its secure location

## KRD-2 BEST Core Model (Cores and Keys not included)

Two core retaining device with one retained core and key and one release core and key. Accepts 5, 6 and 7 pin BEST cores

### Specifications

**Case** – Precision machined from solid aircraft aluminum bar stock

**Size** – 2-1/4" High x 4-1/2" Long x 2-1/4" Deep.

**Weight** – 2 pounds

**Finish** – Clear anodized – 628 \*

**Options** – S: Internal low-voltage SPDT switch  
SS: Security Seal

\* Other colors are available



## KRD-2H Hybrid (Cores and Keys not included)

The Hybrid KRD is used to combine, in one device, a BEST core with another manufacturer's core. Two models are currently available: Sargent RC and Schlage FSIC (contact your local BEST office for information on other models).



These two KRD-2H Hybrids have the BEST core as the retained position, but the user can decide which core position is to be the release and which is to be the retained.

Specifications for KRD-2H Hybrids are the same as the KRD-2 shown above.

# KRD Series – Key Retaining Devices

## KRD-2 Non-BEST Full Size Core Models (Cores and Keys not included)

Identical in operation to the KRD-2 for BEST cores, but these devices will accept other manufacturers' IC's and RC's. Some manufacturers of both 6 and 7-pin cores require a different version for each. A complete listing appears in HOW TO ORDER below. Specifications for these models are the same as the KRD-2 shown on the previous page.

## KRD-3 BEST Core Dual Function Model (Cores and Keys not included)

This three core model accepts BEST 5, 6 and 7-pin cores and provides the user with a choice of two different functions:

**Function "A"** – Dual Custody - 2 release keys presented to release 1 retained key: Two release keys must be simultaneously inserted into the retaining device and rotated 90 degrees. The rotation of these two keys traps them and releases the retained key. The release keys remain trapped until the retained key is returned and rotated. When this happens, the release keys can be extracted, but the retained key is trapped.

**Function "B"** – 1 release key presented to release 2 retained keys: A release key is inserted into the retaining device and rotated 90 degrees. The rotation of this key releases the retained keys, which should both be simultaneously removed, and traps the release key. The release key remains trapped until both of the retained keys are returned and rotated. When this happens, the release key can be extracted, but the retained keys are trapped.

### Specifications

**Case** – Precision machined from solid aircraft aluminum bar stock

**Size** – 2-1/4" High x 6-3/4" Long x 2-1/4" Deep.

**Weight** – 3 pounds

**Finish** – Clear anodized – 628 \*

**Options** – S: Internal low-voltage SPDT switch  
SS: Security Seal

### KRD Options – S Switch

Internal low-voltage SPDT switch rated at 5A, 125VAC supplied with a 3-wire, 36" jacketed cable. This switch can be used to connect any KRD to an annunciator, control circuitry, a camera, an access control system with alarm monitoring capability, a linked output, etc.

### SS Security Seal(s) (Seals not included)

Allows you to use a breakable seal on a retained key to provide a simple and effective visual indicator that this key has NOT been used.

Specify quantity and post location(s)

\* Other colors are available



## How To Order – Key Retaining Devices

| Key Retaining Devices                   | Part Number            |
|---|------------------------|
| KRD-2 BEST Core Model                   | UL-KRD-2               |
| KRD-2H Hybrid (Sargent/BEST Model)      | UL-KRD-2H SAR/BEST     |
| KRD-2H Hybrid (BEST/Schlage FSIC Model) | UL-KRD-2H BEST/SCH     |
| KRD-3 BEST Core Dual Function Model     | UL-KRD-3               |
| <b>Non-BEST Full Size Core Models</b>   |                        |
| KRD-2 Corbin Russwin 6-pin IC           | UL-CR6-KRD-2           |
| KRD-2 Corbin Russwin 7-pin IC           | UL-CR7-KRD-2           |
| KRD-2 Medeco IC                         | UL-MED-KRD-2           |
| KRD-2 Sargent RC                        | UL-SAR-KRD-2           |
| KRD-2 Schlage FSIC                      | UL-SCH-KRD-2           |
| KRD-2 Yale 6-pin IC                     | UL-YA6-KRD-2           |
| KRD-2 Yale 7-pin IC                     | UL-YA7-KRD-2           |
| Switch and Security Seal Options        | Add -S and/or -SS su x |

Also available: Special KRD-4, Custom Hybrids and Functions, Multi-Key Switches, etc.

For questions about ordering and to be sure you get the right configuration for your needs, [contact your BEST dormakaba sales representative](#).  
6161 East 75th Street, Indianapolis, IN 46250 USA | [855-365-2407](tel:855-365-2407) | [bestaccess.com](http://bestaccess.com)

BEST is a trademark of dormakaba Holding® 2020 All rights reserved. BEST is a member of the dormakaba Group, one of the top three providers for access and security solutions, globally.



BA-0031 01/22